



MANUFACTURER NEWLIFE MAGNETICS

NEWLIFE MAGNETIC DISPLAY SYSTEM SPECIFICATION SHEET


NEWLIFE MAGNETIC BASE SERIES **NM-NPSA-030**

Edition: A0 NO: NMEQS-MACO 173

FEATURES AND ADVANTAGES:

- Standard energy magnetic base, black surface, works with magnet receptive print media.
- Works using magnetic principle with iron or steel material, easy to apply, remove and change, without residue
- Permanently magnetized, anti-rust
- Excellent for durable indoor displays, such as retail displays.


CONSTRUCTION DRAWING:

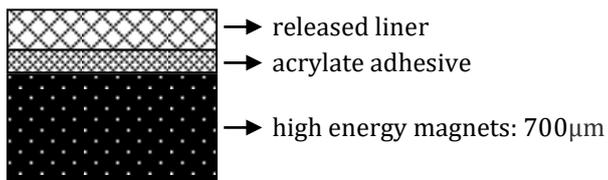

STANDARD SIZES:

24.375",30",40",48" 15mil,20mil,30mil

PACKAGING:

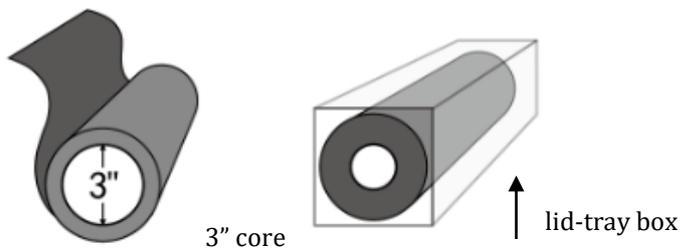

MAGNETIC DATA:

Pull Strength: ≥ 35.0 (g/cm²)
Guass: ≥ 285 Gs

PHYSICAL DATA:

Total thickness	900µm (±80)
Weight	2700g/M ² (±250)
Appearance	Black
Opacity	100%
Water resistance	Middle-high

ADHESION DATA:

GB/T 2792-1998 – 180 degree, adhesion to stainless steel
N/25mm
- 30 minutes RT 8

PROCESS AND STORAGE:

- Working condition: temperature 15°C to 30°C, and relative humidity 30% to 60%.
- Application condition: temperature change is within 40°C daily.
- Storage condition: closed avoiding direct sunlight, in temperature 10°C to 35°C, relative humidity 20% to 70%
- Shelf life: 12 months under normal storage conditions. Unfinished material should be seal-packed, and used up within 2 weeks.

NOTICE:

- Before install, make sure the wall surface is clean, dry and flat.
- For more information, please get reference from our "User Guide"